
Hinomaru


Mirco Crosatto

2018

Hinomaru's thin and shiny metallic perimeter in rose gold or black nickel houses the topLED light source. Illumination is transmitted to the large central disc thanks to the OptiLight™ technology, emitting a soft and uniform light into the environment. • **Metal body and wire casing, PMMA diffuser. Finishes: galvanic pink gold, black galvanic nickel.**



Hinomaru est doté d'un bord métallique élégant et brillant, en or rose ou en nickel noir, qui abrite la source topLED. La lumière est transmise au grand disque central grâce à la technologie OptiLight™, qui diffuse un éclairage doux et uniforme dans la pièce. • **Corps et pavillon en métal, diffuseur en PMMA. Finitions : galvanisé or rose, galvanisé nickel noir.**

Hinomaru presenta un perímetro metálico fino y brillante en oro rosa o níquel negro, que alberga la fuente topLED. La luz se transmite al gran disco central gracias a la tecnología OptiLight™, que difunde una iluminación suave y uniforme en los espacios. • **Cuerpo y cubierta de cable en metal, difusor en PMMA. Acabados: galvánico oro rosa, galvánico níquel negro.**

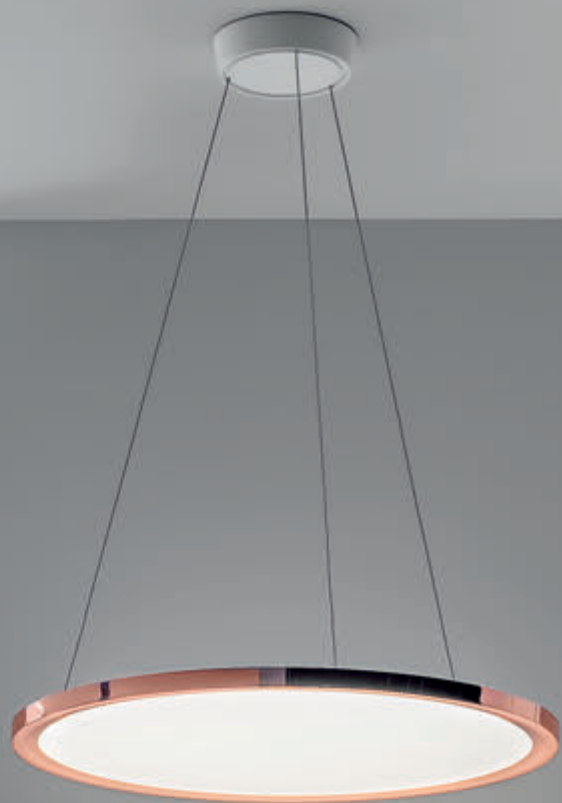



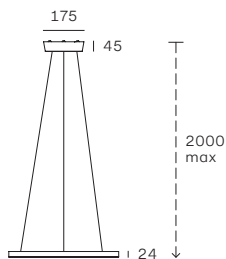

1. Hinomaru Ø48






477

Dimming kits



-  **KIT0080**
PH-CUT / 1 art / out
-  **KIT0026**
PH-CUT / 1-3 art

2. Hinomaru Ø67



668

Dimming kits

-  **KIT0080**
PH-CUT / 1 art / out
-  **KIT0026**
PH-CUT / 1-2 art



MOD	CODE	FINISH	SOURCE	INPUT	DIMMING	CCT (K)	LUMEN	CRI	IP	OPTICS
1	8614	BN	TopLED 30W	220-240V	Phase-cut	3000	4042	90	40	Diffused
	8615	GP	TopLED 30W	220-240V	Phase-cut	3000	4042	90	40	Diffused
2	8618	BN	TopLED 42W	220-240V	Phase-cut	3000	5671	90	40	Diffused
	8619	GP	TopLED 42W	220-240V	Phase-cut	3000	5671	90	40	Diffused